



## FEATURES

Extruded Round Aluminum Housing with Built-in Heat Sinks, Powdercoat Finish Over a Chromate Conversion Coating.

White Reflector

Clear Flat Glass Lens

Mount Over a 4" Recessed Outlet Box

**Distribution:** Type V

**LED:**

DuraGuard COB  
CRI: 80+; CCT: 4100K  
Rated Life: 50,000 Hours, 5-Year Warranty

**Wattage:** Total COB: 40w

**Driver:** Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

**Listings & Ratings:** CSA: Listed for Wet Locations; IP67


**Options:** Surge Protection

## Astra LED Up/Down Wall Cylinder



**WCTRD**

## DIMENSIONS

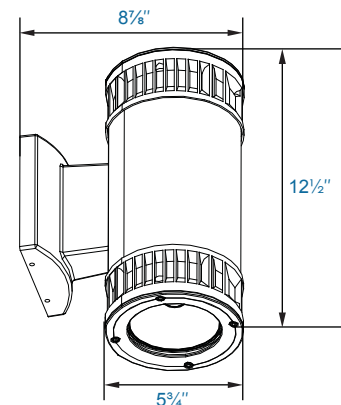

**WCTRD**

## ORDER INFORMATION

### Astra LED Up/Down Wall Cylinder

Catalog #	Description
<b>Complete Units</b>	
<b>Ordering Information</b>	
Example: WCTRDAC32X20U41KZSP	
<b>WCTRD</b>	<b>Model:</b> WCTRD
<b>A</b>	<b>Optics:</b> A=70° Up/70° Down, B=100° Up/100° Down, C=70° Up/100° Down
<b>C3</b>	<b>LED:</b> C3=QSSI COB
<b>2X</b>	<b>Number of COBs:</b> 2X=Two
<b>20</b>	<b>Wattage:</b> 20=20w
<b>U</b>	<b>Ballast:</b> U=120-277V
<b>41K</b>	<b>CCT:</b> 41K=4100K
<b>Z</b>	<b>Color:</b> Z=Bronze
<b>SP</b>	<b>Options:</b> SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

## APPLICATIONS

Accentuate the Architecture of Buildings, Entry Lighting

LED

**ACCESSORIES**

120V Button  
Photocell - **PC1**



**PC1**

**PHOTOMETRICS**