



FEATURES

Extruded Round Aluminum Housing with Built-in Heat Sinks, Powdercoat Finish Over a Chromate Conversion Coating.

White Reflector

Clear Flat Glass Lens

Mount Over a 4" Recessed Outlet Box

Distribution: Type V

LED:

DuraGuard COB
CRI: 80+; CCT: 4100K
Rated Life: 50,000 Hours, 5-Year Warranty

Wattage: COB: 20w

Driver: Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

Listings & Ratings: CSA: Listed for Wet Locations; IP67


Options: Surge Protection

Astra LED Up or Down Wall Cylinder



WCTRS

DIMENSIONS

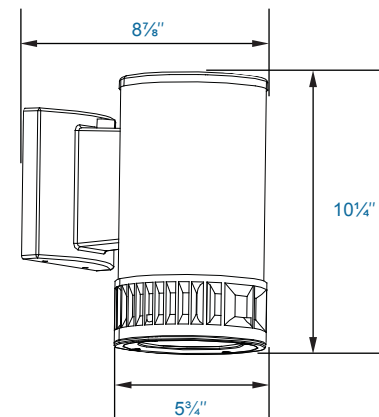

WCTRS

ORDER INFORMATION

Astra LED Up or Down Wall Cylinder

Catalog #	Description
-----------	-------------

Complete Units

Ordering Information

Example: WCTRSBC31X20U41KZSP

WCTRD	Model:	WCTRS
A	Optics:	A=70° Reflector, B=100° Reflector
C3	LED:	C3=QSSI COB
2X	Number of COBs:	1X=One
20	Wattage:	20=20w
U	Ballast:	U=120-277V
41K	CCT:	41K=4100K
Z	Color:	Z=Bronze
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

APPLICATIONS

Accentuate the Architecture of Buildings, Entry Lighting

LED

ACCESSORIES

120V Button
Photocell - **PC1**



PC1

PHOTOMETRICS